



## HOBO® UX100 Series Data Loggers

The HOBO UX100 Series is Onset's next-generation family of data loggers for tracking temperature and relative humidity in indoor environments.

HOBO UX100 Series offers a dramatic price/performance advantage over competitive products by delivering higher accuracy, larger measurement capacity, and more LCD display features to make environmental data collection faster and easier than ever. The loggers provide a variety of features to reduce deployment time, and offer new logging modes for recording and displaying more detailed data without extensive post-processing or memory use.



### Supported Measurements:


Temperature, Relative Humidity, Dew Point, Thermocouple

### Key Advantages:

- Easy-to-view LCD display
- Large memory capacity
- Flexible mounting options
- Visual high & low alarm thresholds
- New Burst and Statistics logging modes
- User-replaceable RH sensors
- Temp, temp/RH, and thermocouple models available



### Common Features of HOBO UX100 Series Loggers

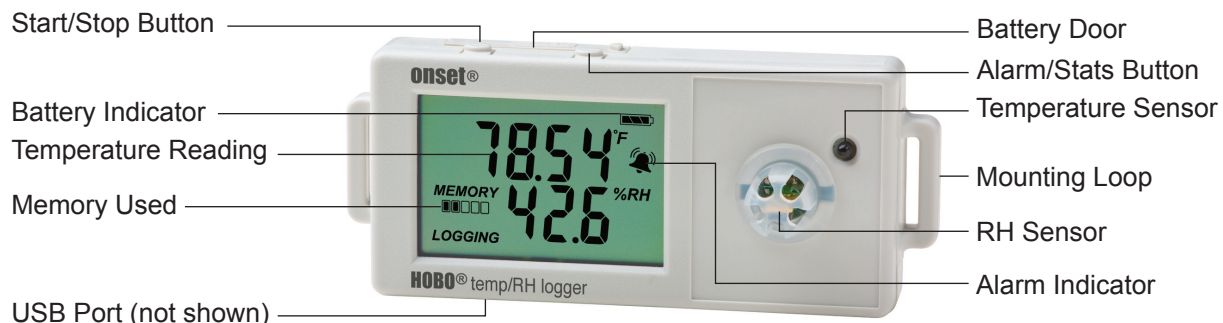

# HOBO UX100 Loggers

► For complete information and accessories, please visit: [www.onsetcomp.com](http://www.onsetcomp.com)

Part number	UX100-001 (Temp)	UX100-003 (Temp/RH)	UX100-011 (Temp/RH)	UX100-023 (Ext Temp/RH)
Memory	84,650 measurements			
Sampling Rate	1 second to 18 hours, user selectable			
Battery Life	1 year typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user-replaceable, CR2032			
Dimensions	3.66 x 5.94 x 1.52 cm (1.44 x 2.34 x 0.6 in.)		3.66 x 8.48 x 1.52 cm (1.44 x 3.34 x 0.6 in.)	
Temperature				
Range	-20° to 70°C (-4° to 158°F)			
Accuracy	±0.21°C from 0° to 50°C (±0.38°F from 32° to 122°F)			
Resolution	0.024°C at 25°C (0.04°F at 77°F)			
Response Time (airflow of 1 m/s (2.2mph))	8 minutes to 90%	4 minutes to 90%		6 minutes to 90%
Relative Humidity				
Range	n/a	15% to 95%	1% to 95%	
Accuracy	n/a	±3.5% from 25% to 85%	±2.5% from 10% to 90%	
Resolution	n/a	0.07% at 25°C (77°F)	0.05% at 25°C (77°F)	
Response Time (airflow of 1 m/s (2.2mph))	n/a	43 seconds to 90%	11 seconds to 90%	5 minutes to 90%
CE compliant	Yes			

Part number	UX100-014M (Thermocouple)		
Memory	208,076 measurements		
Sampling Rate	1 second to 18 hours, user selectable		
Battery Life	1 year, typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user-replaceable, CR2032		
Dimensions	3.66 x 8.48 x 1.52 cm (1.44 x 3.34 x 0.6 in.)		
Operating Range	Logging: -20° to 70°C (-4° to 158°F); 0 to 95% RH (non-condensing)		
Thermocouple	Range	Accuracy	Resolution
Type J	-210° to 760°C (-346° to 1,400°F)	±0.6°C (±1.08°F) ± thermocouple probe accuracy	0.03°C (0.06°F)
Type K	-260° to 1,370°C (-436° to 2,498°F)	±0.7°C (±1.26°F) ± thermocouple probe accuracy	0.04°C (0.07°F)
Type T	-260° to 400°C (-436° to 752°F)	±0.6°C (±1.08°F) ± thermocouple probe accuracy	0.02°C (0.03°F)
Type E	-260° to 950°C (-436° to 1,742°F)	±0.6°C (±1.08°F) ± thermocouple probe accuracy	0.03°C at (0.05°F)
Type R	-50° to 1,550°C (-58° to 2,822°F)	±2.2°C (±3.96°F) ± thermocouple probe accuracy	0.08°C (0.15°F)
Type S	-50° to 1,720°C (-58° to 3,128°F)	±2.2°C (±3.96°F) ± thermocouple probe accuracy	0.08°C (0.15°F)
Type B	550° to 1,820°C (1,022° to 3,308°F)	±2.5°C (±4.5°F) ± thermocouple probe accuracy	0.1°C (0.18°F)
Type N	-260° to 1,300°C (-436° to 2,372°F)	±1.0°C (±1.8°F) ± thermocouple probe accuracy	0.06°C (0.11°F)

## Contact Us

- ☎ Speak with an application specialist by calling 1-800-564-4377
- ✉ Email your inquiry to [sales@onsetcomp.com](mailto:sales@onsetcomp.com)
- 📖 Go to [onsetcomp.com](http://onsetcomp.com) to browse our white papers, application stories, videos, and webinars

Onset  
470 MacArthur Boulevard  
Bourne, MA 02532

## About Onset

Onset is a leading supplier of data loggers. Our HOBO data loggers, data nodes, and energy logging systems can be rapidly deployed in a wide range of energy management applications, including energy audits, Measurement & Verification, building commissioning, and indoor air quality studies. Based on Cape Cod, Massachusetts, Onset has sold more than 2 million data loggers since the company's founding in 1981.

